



CRN TECNOPART, S.A.

Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com http:// www.crntecnopart.com

CETAL

CT- 080.06E

PORTABLES IMMERSION HEATERS

Easy to use in open tanks with a significant liquid level, and relatively constant. Choosing the right model depends on the bearing capacity of the liquid to boil. They are handy to use, and require no adaptation to heat the container for installation.

COMMON FEATURES

Bakelite protective cap

Connecting cable, grounded, of 1250 mm. long. No plug.

PL = Total length. NC = unheated length. LC = heated length


TB SERIES for water – Nickel-plated copper tube – 230 V mono –

DH SERIES for oil – AISI 321 stainless steel tube– 230 V mono –

PB SERIES for acid solutions– steel tube coated with lead – 230 V mono

PL = 500 mm.
NC = 300 mm.
PL = 750 mm.
NC = 500 mm.
PL = 700 mm.
NC = 500 mm.


The standard models are marked

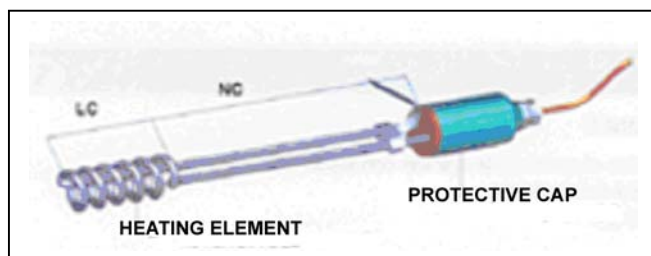

W	Ø mm.	Weight Kg	Ref
Serie TB load 6W/cm²			
1000	40	0,80	TB 10
1500	45	0,85	TB 15
2000	50	0,90	TB 20
3000	50	1,15	TB 30
Serie DH load 2W/ cm²			
500	45	0,90	DH 5
750	45	0,95	DH 7
1000	45	1,05	DH 10
Serie Pb load 2W/ cm²			
2000	80	3,10	PB 20
3000	80	3,10	PB 30

TR SERIES TR for water – Nickel-plated copper tube – 230/400 V –

PL = 500 mm.
NC = 300 mm.

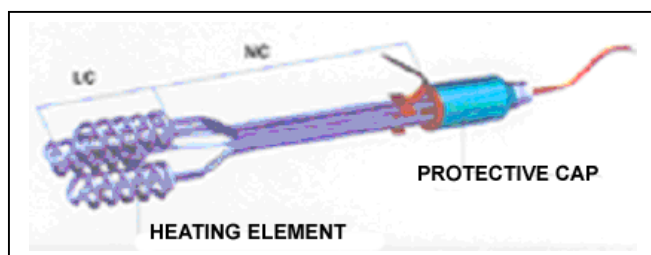


W	Ø mm.	Weight Kg	Ref
Serie TR load 6W/cm²			
3000	95	1,40	TR 30
4500	100	1,50	TR 45
6000	100	2,70	TR 60*
9000	115	2,85	TR 90*

* Protective cap Aluminium

RV SERIES for wine – AISI 321 stainless steel tube– 230 V mono -

Ø = 34 mm.

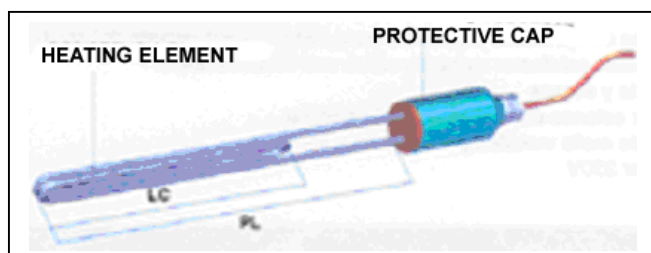

W	PL mm	LC mm	Peso Kg	Ref
Serie RV load 2W/ cm²				
1000	1000	250	1,10	RV 10
1500	1125	375	1,35	RV 15
2000	1250	500	1,50	RV 20
3000	1500	750	1,60	RV 30
3x1000	1200	500	2,70	RV 30T

* 230/400 V