



CRN TECNOPART, S.A.

Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com [http:// www.crntecnopart.com](http://www.crntecnopart.com)



MOUNTING ACCESSORIES


KA PORCELAIN TERMINALS

Maximum working temperature 250 °C



Model	Reference	Diameter	Supply
KA 1	10 25 11	1 x 2,5 mm ²	10 units.
KA 2	10 25 12	2 x 2,5 mm ²	10 units.
KA 3	10 25 13	3 x 2,5 mm ²	10 units.
KA 4	10 25 14	4 x 2,5 mm ²	10 units.

ADHESIVE TAPES

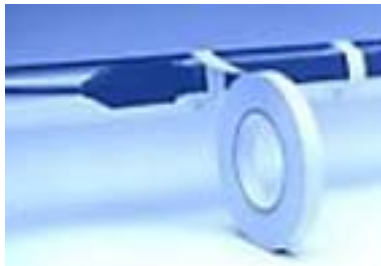

GKB – 120 °C

Adhesive tape. Glass fabric with acrylate adhesive (curing) for the fixing of heating tapes and temperature sensors. Max. Operating temperature 120 °C.

GIB – 200 °C

High quality adhesive tape. Glass fabric with silicone glue. Corresponds to class H (180 °C), suitable for the mounting of heating cables up to 200 °C.

GAB – 120 °C

Heavy aluminum-foil tape with acrylate adhesive (curing) for the gluing of plastic-insulated heating cables and tapes. Aluminum guarantees a very good heat transfer and heat distribution.



MODELS AVAILABLE

Model	Reference	Diameter	Supply
GKB - 120	10 01 01	15 mm.	Roll de 55 m.
GIB - 200	10 01 02	15 mm.	Roll de 33 m.
GAB/50 - 120	10 01 03	50 mm.	Roll de 55 m.
GAB/25 - 120	10 01 05	25 mm.	Roll de 55 m.

SP TENSION BAND AND SPV QUICK LOCK



Tension band for the mounting of plastic-insulated heating cables at pipes and containers with greater diameters. Material: 1.4301

Model	Reference	Breadth	Supply
SP	10 12 01	10 mm.	Roll de 10 m.



SPV Quick lock for SP tension band. Material: 1.4301

Model	Reference	Diameter	Supply
SPV	10 12 02	For tube < 60 mm	10 units
SPV	10 12 03	For tube > 60 mm	10 units

SPACER TAPES



ABF

Spacer tape made of VA 1.4301 for the installation of heating tapes at containers. The spacer tape itself can be fixed by spotwelding or with tension bands. Minimum spacing: 45 mms.

Model	Reference	Supply
ABF	10 11 01	5 m.



AB

Spacer tape for the fixing of plastic-insulated heating cables at surfaces and cylindrical heating. Minimum spacing: 15 mms.

Model	Reference	Supply
AB	10 09 01	A metros

PTFE HEAT SHRINKABLE TUBINGS 250 °C



Shrinking rate: 4:1

Model	Reference	Size	Supply
PTFE-SS.1/4	10 05 20	1/4"	Meters
PTFE-SS.1/2	10 05 21	1/2"	
PTFE-SS.1	10 05 22	1"	

FINISHING SETS



FOR HKSP AND HKSI

Reference	
02 16 21	2 connection
02 16 22	1 connection, 1 end termination
02 16 23	1 connection and distribution box



FOR SELF LIMITING CABLES

Reference	
02 16 03	For cable HBRC
02 16 04	For cable HBRT