



CRN TECNOPART, S.A.

Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com [http:// www.crntecnopart.com](http://www.crntecnopart.com)

ELSTEIN

IRE- 090.35E



FIS CERAMIC FOCUS INFRARED RADIATORS

Elstein focus infrared radiators FIS are ceramic IR-dark radiators with reflector made of aluminium and E27 screw caps.

The aluminium reflector focuses the infrared radiation being generated by a ceramic rod radiator so that the FIS radiator transmits a high radiation power to a small area.

This concentration of radiation power is especially suited for solving tasks dealing with the heating of selective or small areas.

The standardised E27 thread allows easy and safe installation, as the radiators can be screwed in like bulbs into porcelain or metal sockets with porcelain insert.

The standard power of Elstein focus infrared radiators FIS is 250 W.



Type, weight, wattage 230 V	FIS 90 g	250	W
Surface rating		12,3	KW/m ²
Typical operating temperature		750	° C
Maximum permissible temperature		750	° C
Wavelength range		2 - 10	µm

Standard design	Thermocouple radiators	Variants
Operating voltage 230 V Aluminium reflector E27 Edison screw cap	Not available. For means of controlling output see below.	Special wattages Special voltages



The power can be adjusted using proprietary power controllers or dimmers.

Porcelain or metal sockets with porcelain inserts are to be used both for electrical and mechanical connection of Elstein FIS radiators. The sockets must not contain any plastic components.

The national safety regulations must be complied with for the respective application, for example, the IEC or EN standard 60519-1, Safety in electrical heating installations.


Our instructions for mounting, operation and safety must be observed.

FIS MOUNTING DIMENSIONS AND RADIATOR DIMENSIONS () IN MM AND POWER DISTRIBUTION

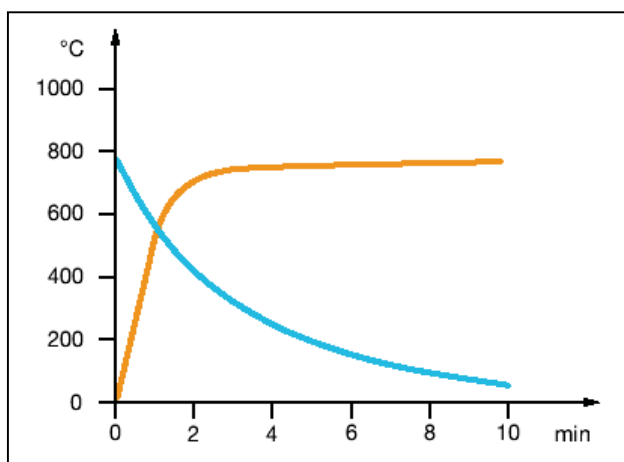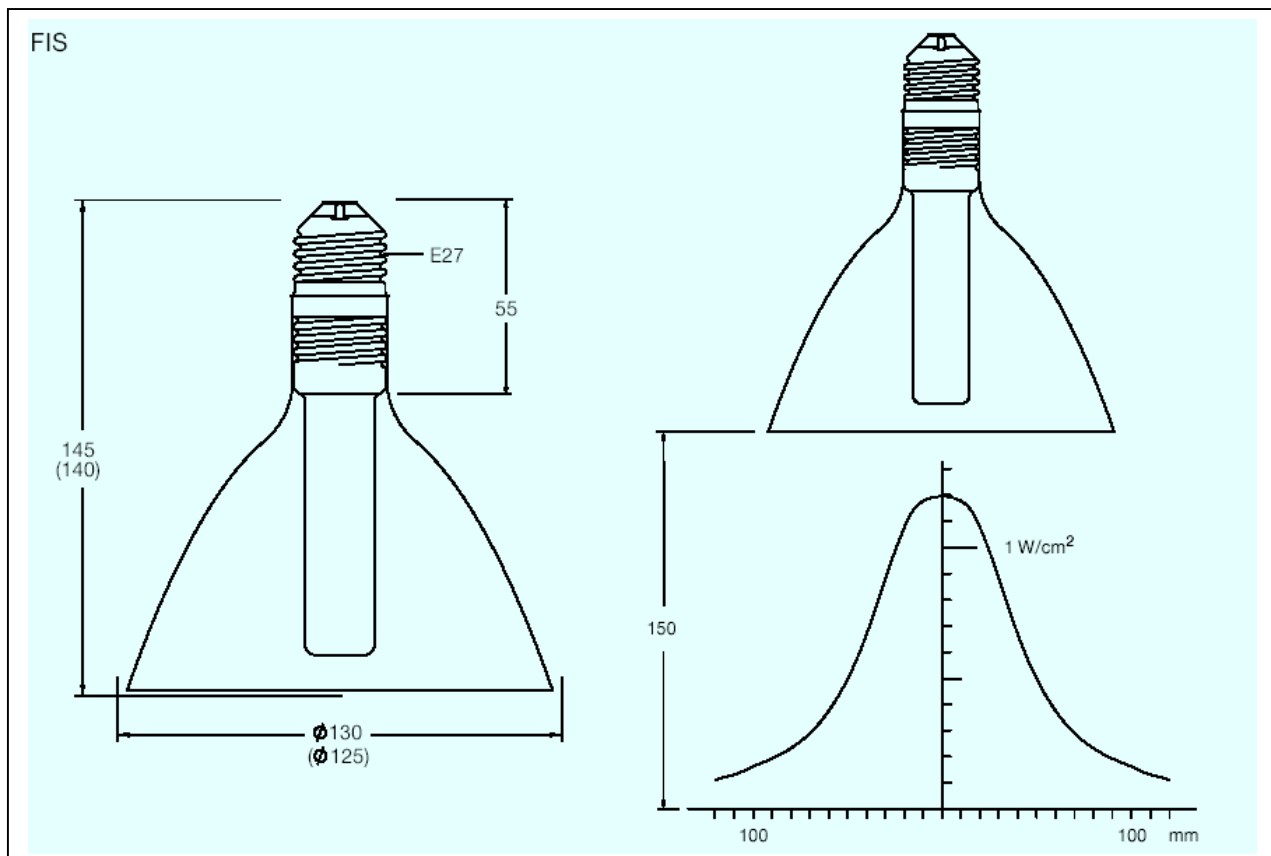

Radiator temperatures

Heating-up: red curves
Cooling-down: blue curve

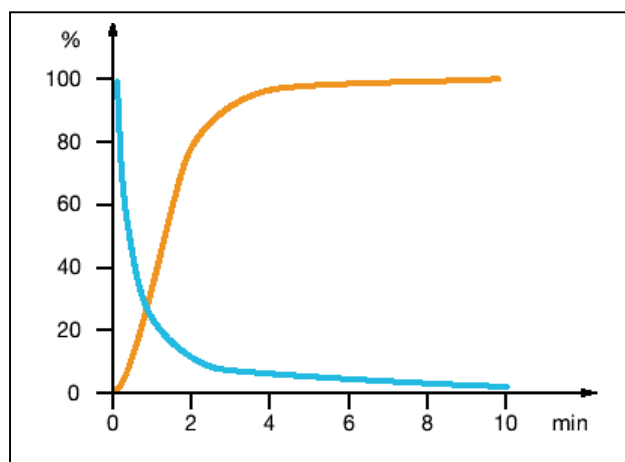

Radiant powers

Heating-up: red curves
Cooling-down: blue curves