



CRN TECNOPART, S.A.

Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com [http:// www.crntecnopart.com](http://www.crntecnopart.com)

ELSTEIN

IRE- 090.29E



IPT INFRARED RADIATOR WITH 27 SCREW CAPS

Elstein IPT radiators are ceramic infrared dark radiators with E27 screw caps.

The standardised E27 thread allows easy and safe installation. The radiators can be screwed in like bulbs into porcelain or metal sockets with porcelain insert.

Due to their simple connection, IPT infrared radiators are suitable both for individual operation and for configuring groups of radiators. Heaters of the IPT series are mainly used for two applications.

In sulphur evaporators IPT/75 makes the sulphur liquid and evaporating, so that fighting against vermin is done in an environment-friendly way.

A further application is using the heaters of the IPT series in terrariums to generate comfortable and close-to-nature heat radiation for reptiles and insects.

Elstein IPT screw radiators are available in three designs and power ranges from 60 W to 500 W




Type, weight, wattage 230 V	IPT/75 85 g	60	100	-	-	-	-	W
	IPT/100 150 g	-	-	150	250	-	-	W
	IPT/125 210 g	-	-	-	-	300	500	W
RIO aluminium reflector	RIO 125 65 g	
Surface rating		8,6	14,4	13,2	22,0	18,1	30,3	KW/m ²
Typical operating temperature		290	380	370	460	430	510	° C
Maximum permissible temperature		530	530	530	530	530	530	° C
Wavelength range		2 - 10						µm

Standard design	Thermocouple radiators	Variants
Operating voltage 230 V Ceramic hollow casting E27 Edison screw cap Available aluminium reflector RIO / 125	Not available. For means of controlling output see below.	Special wattages Special voltages


The power can be adjusted using proprietary power controllers or dimmers. Porcelain or metal sockets with porcelain inserts are to be used both for electrical and mechanical connection of Elstein IPO radiators. The sockets must not contain any plastic components. The national safety regulations must be complied with for the respective application, for example, the IEC or EN standard 60519-1, Safety in electrical heating installations. Our instructions for mounting, operation and safety must be observed.

IPT MOUNTING DIMENSIONS AND RADIATOR DIMENSIONS () IN MM


IPT/75




IPT/100



IPT/125




RIQ/125

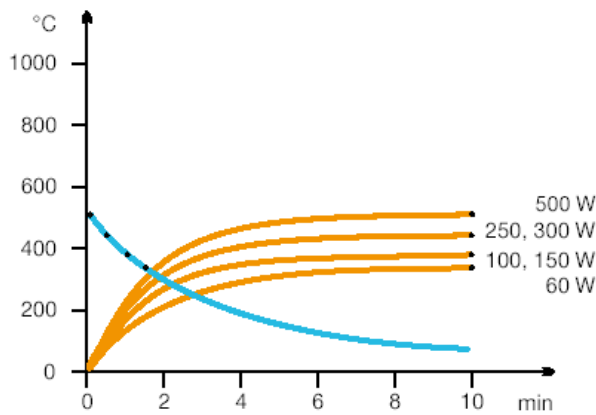

Radiator temperatures

Heating-up: red curve
Cooling-down: blue curve

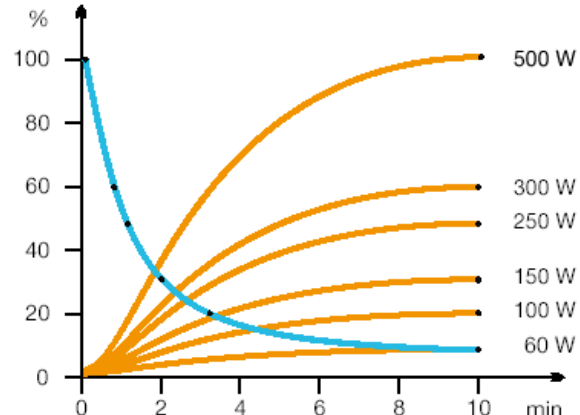

Radiant powers

Heating-up: red curve
Cooling-down: blue curve