




## CRN TECNOPART, S.A.

Sant Roc 30  
08340 VILASSAR DE MAR (Barcelona)  
Tel 902 404 748 - 937 591 484 Fax 937 591 547  
e-mail: [crn@crntp.com](mailto:crn@crntp.com) [http:// www.crntecnopart.com](http://www.crntecnopart.com)




DO-100.471E

## INDUSTRIAL pH ELECTRODES

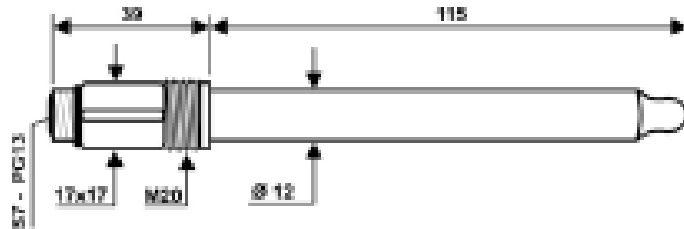


### KPI 10

Combined industrial electrode,  
 $\varnothing$  12x120 mm, temperature 0÷130°C,  
S7 PG13.5, connector refillable  
Glass shaft, Ag/AgCl sat KCl  
Porous teflón junction.

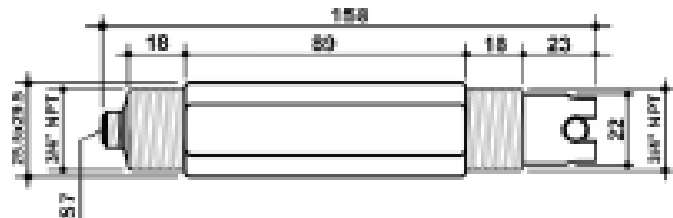


### KPI 11

Combined industrial electrode,  
 $\varnothing$  22x158 mm, temperature 0÷100 °C  
S7 and 1" connectors refillable  
Ryton shaft, Ag/AgCl sat KCl,  
Porous teflón junction.

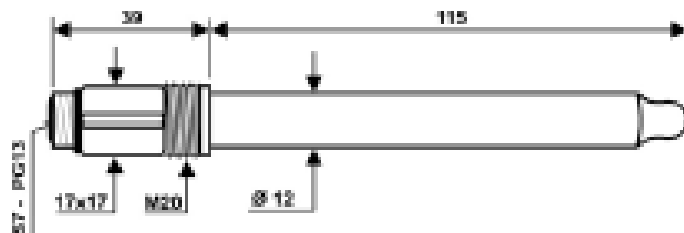

### KPI 12 Redox

Platinum Electrode Redox measures  
 $\varnothing$  12x120 mm, temperature 0÷130°C,  
S7 PG13.5, connector  
Maximum pressure 6 bar.

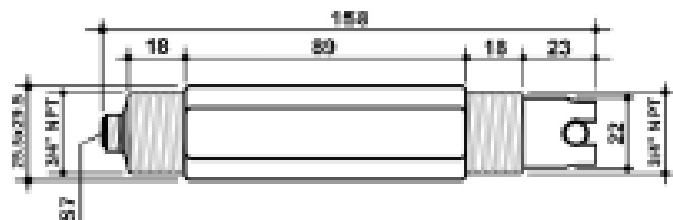

### KPI 13 Redox

Platinum Electrode Redox measures,  
 $\varnothing$  22x158 mm, temperature 0÷100 °C  
S7 PG13.5, connector  
Ryton shaft, Ag/AgCl sat KCl,