



CRN TECNOPART, S.A.

Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com [http:// www.crntecnopart.com](http://www.crntecnopart.com)


EAFW

EA-090.10E

CUT OFF HEAT SEALING WIRES & TAPES

For use in packaging and packaging industries for welding cutting and sealing of plastics in manufacturing packaging bags, etc .. well as in packaging, filling and packaging products

AVAILABLE FORMATS

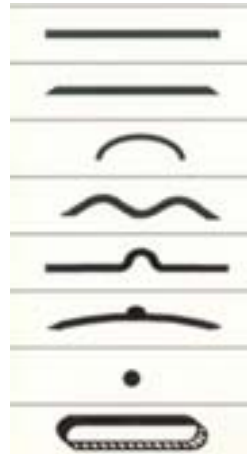

Flat Element
Tapered Edge Element
Concave Element
Double Seal Element
Beaded Element
T-Shape Element
Cutting Wire
Endless Steel Bands

MODELOS DISPONIBLES

DESCRIPTION	WIDTH mm.	THICKNESS mm.	COMMON APPLICATIONS	AVAILABLE
Flat Element	1 a 15	0,1 - 0,5	Common sealing	10 or 25m
Tapered Edge Element	2 a 15 .	0,1 - 0,5 .	Common sealing	10 or 25m
Concave Element	2 a 6 mm.	0,1 - 0,4 .	Vacuum packaging	10 or 25m
Double Seal Element	4 - 6 - 8	0,3	Liquids	10 or 25m
Beaded Element	2 - 4 - 6	0,15-0,25 .	Cut - Seal	10 or 25m
T-Shape Element	2,8 - 4 .	0,3	Cut - Seal	10 or 25m
Cuting Wire	Ø 0,3 a 2	-	Cut - Seal	10 or 25m
Endless Steel Bands	Bajo pedido	0,07 0,127 0,177	Continuous sealing	Mínimumm 5 un.

The tape can be supplied flat TEFLON® lined on both sides or on one side.

The thread can be supplied with Teflon-lined

TEFLON® Is a registered trademark of Dupont Ltd.

ENDLESS TAPE FOR SEALING

They are made of stainless steel.

Are available in three thicknesses: **0,076 mm**
0,127 mm
0,177 mm

They can be supplied in different lengths and widths, always on customer specifications.

Depending on the diameter of the rollers is recommended thickness for the film following:

Ø 1½" (38 mm.) = thickness 0.076 mm.
Ø 2½" (63 mm.) = thickness 0,127 mm.
Ø 3½" (89 mm.) = thickness 0,177 mm



MODELS SUPPLIED IN NICHROME 80/20

FLAT ELEMENT

Size in mm.	80/20 Ni/Cr Resistance Ohm/m.	M/kg
2 x 0,1	5,458	608
2 x 0,15	3,659	408
2 x 0,2	2,759	307
2 x 0,25	2,219	247
2 x 0,3	1,860	207
2,5 x 0,1	4,357	486
2,5 x 0,15	2,917	325
2,5 x 0,2	2,198	245
2,5 x 0,25	1,766	197
2,5 x 0,3	1,478	165
3 x 0,1	3,626	404
3 x 0,15	2,426	270
3 x 0,2	1,826	203
3 x 0,25	1,466	163
3 x 0,3	1,226	137
4 x 0,2	1,365	152
4 x 0,25	1,095	122
4 x 0,3	0,915	102
5 x 0,2	1,089	121
5 x 0,25	0,873	97
5 x 0,3	0,729	81
5 x 0,4	0,540	61
5 x 0,5	0,441	49



ROUND WIRE

Ø mm.	80/20 Ni/Cr Resistance Ohms/m.	M/kg
0,3 mm.	15,26	1702
0,4 mm.	8,59	958
0,5 mm.	5,50	612
0,6 mm.	3,82	425
0,7 mm.	2,80	312
0,8 mm.	2,14	239
0,9 mm.	1,69	189
1,0 mm.	1,37	152
1,1 mm.	1,13	126
1,2 mm.	0,95	106

PTFE TEFLON® TAPES



They can be supplied in rolls of 30 meters.

Widths from 10 mm.

Are available in the following thickness:

3th = 0.076 mm

5th = 0,127 mm

6th = 0,153 mm

10th = 0,255 mm

TEFLON® Is a registered trademark of Dupont Ltd.