



CRN TECNOPART, S.A.


Sant Roc 30
08340 VILASSAR DE MAR (Barcelona)
Tel 902 404 748 - 937 591 484 Fax 937 591 547
e-mail: crn@crntp.com [http:// www.crntecnopart.com](http://www.crntecnopart.com)



IWP 750 SOLUTIONS FOR MONOBLOCKS

MODELOS DISPONIBLES

MODEL	CODE
IWP 750	WP35DI3XCDH07
IWK 201	WK0600300D002

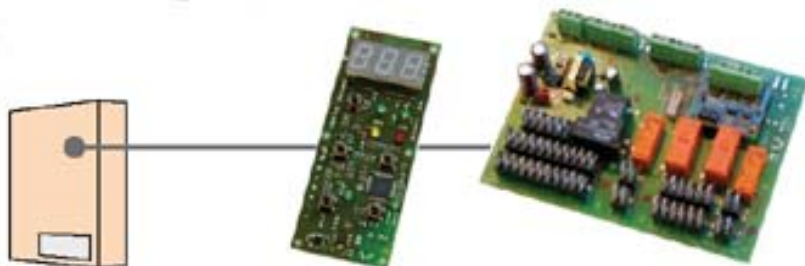

TECHNICAL DATA

	IWP 750
Size	160 x117 mm (Lxh)
Mounting	adaptable a la caja
Power supply	SMPS 100-240 Vac $\pm 10\%$ 50/60 Hz
Power consumption	7,5W max
Range	-50 a 110°C
Analog input	3 NTC
Digital input	3 free voltage
Serial output	TTL for Copy Card connection Serial for connection keyboard "Long Distance" Serial RS 485 for connectio Televis System
Digital output	5 relay outputs (configurable): • Relé 12(12)A (2Hp) 250Vac SPST • Relé 8(4)A 250Vac SPST • OUT3 = Relé 16A 250Vac SPDT • OUT4 = Relé 16A 250Vac SPST • OUT5 = Relé 8(4)A 250Vac SPST

WP 750 The controls are designed to combine high energy saving with maximum ease of installation and use. They are easily applicable also in replacing Control of the preceding series IWP. Thanks to the flexibility of the platform the product is configurable with several relay combinations to best suit the characteristics of the monoblock
»It is a solution designed specifically for monoblocks with panel mount keypad with customizable polycarbonate. Mounted faston type connections for all loads and bolted for all signals. The pendant is installable up to 100 meters. Its optional plate for Televis connection.

